



# DOUBLE CABLE

D A T A   S H E E T



D O U B L E   C A B L E   F O R   B I R D - O U T ®   S Y S T È M E

Double cable (earth / positive) for BIRD-OUT® system


It is specially developed to support peaks of 10,000 volts with pulses of 8 milliamperes.

## MAIN FEATURES :

- Cable with RZ flame retardant PVC sheath and multi-wire copper conductive material
- Light gray color, it has a black sheath and another red to locate the side ⊕

## TECHNICAL DATAS :

- The degree of insulation of the PVC is 300 V and its thickness of 1.7 mm
- The copper wire is 0.75 mm<sup>2</sup> in diameter formed of 24 wires x 0.193 mm
- The outer dimensions of the cable is 4.50 x 9.20 mm

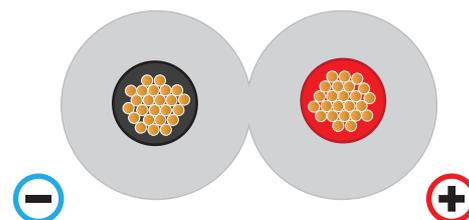

The cable complies with the strictest safety requirements, with standards:

- IEC 60228 (flexibility of class 5 conductors)
- IEC 20-22 II (no flame spread)

## PACKAGING :

- 50 m double cable roll for system BIRD-OUT®

## ECOPIC® ADVICE :

- Thanks to its differentiated sheaths (black and red), which make it easy to spot the ⊕, the BIRD-OUT® cable is ideal in case passing through a chute, in the wall joints, along a gutter ...


**Guarantee :** Refer to the conditions defined in our catalog or on our website.

## SUPPORT STATUS :

- The BIRD-OUT® double cable is suitable for any type of building, sloping roofs, flat roofs, bridges, statues, cornices, tympanums, bell towers, courtyards, lampposts ...
- The substrate must be clean, dry, sound, solid.

## USE :

- See the BIRD-OUT® installation sheet

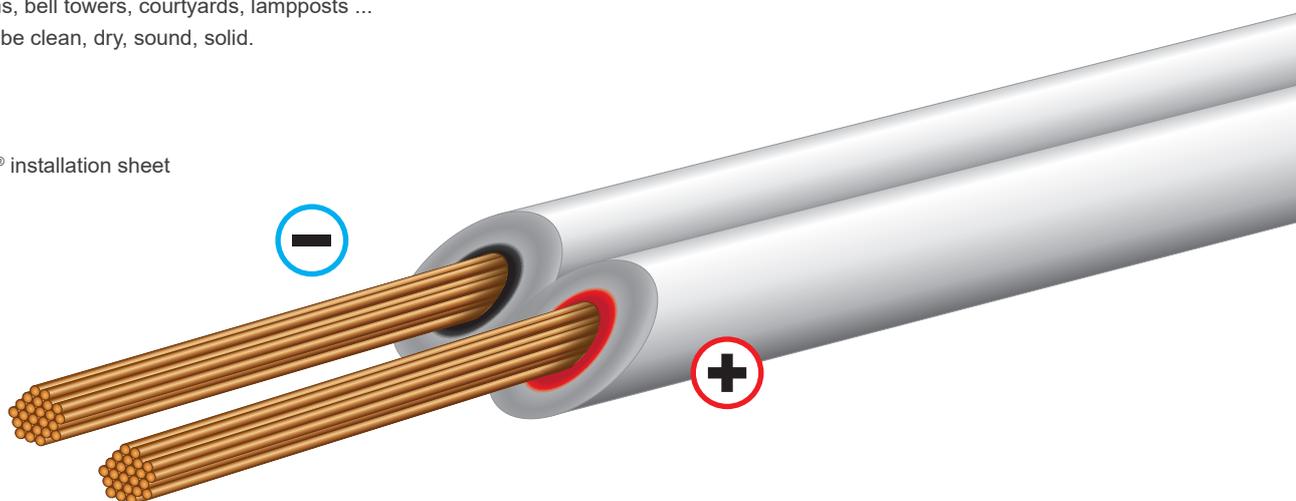

**ECOPIC**

ZAC DU MOULIN  
12 RUE DU MEUNIER  
95700 ROISSY EN FRANCE

PHONE: +33.1.73.27.20.40

FAX: +33.1.30.11.24.55

EMAIL: [ECOPIC@ECOPIC.COM](mailto:ECOPIC@ECOPIC.COM)

[WWW.ECOPIC.COM](http://WWW.ECOPIC.COM)

SAS AU CAPITAL DE 140 000€

401 788 120 RCS PONTOISE

SIRET 401 788 120 00046

APE 4690 Z

TVA FR 80 401 788 120